


Gauge Valve - V02 Series Block and Bleed Manifold

FEATURES

- Isolates and bleeds process from instrument assembly pressure for instrument maintenance
- Stainless Steel 316L (1.4404) construction
- Support mounting brackets available



TYPICAL USES

- Oil & Gas Industry
 - Upstream: Onshore/offshore production
 - Midstream: Transport, storage and natural gas compression
 - Downstream: Refineries and petrochemical industries
- Chemical Industry
- Power Plants
 - Conventional power plants
 - Flue gas desulfurization plants
- Other Industries
 - Waste incineration plants
 - Seawater desalination plants
 - Steel mills
 - Cement plants

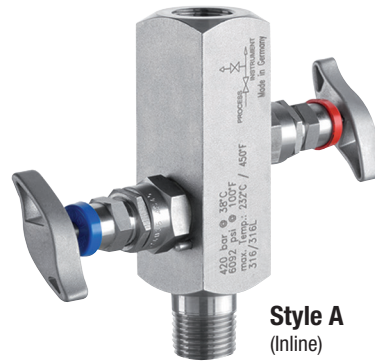


Style A
(Inline)

Style B
(L-Shape)

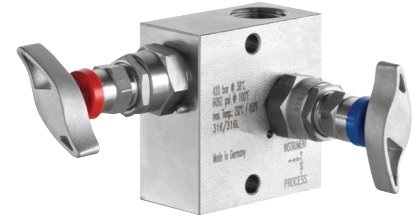

SPECIFICATIONS

Process Connection:	Style A 1/2 NPT Male Style B 1/2 NPT Female Style C 1/2 NPT Female
Instrument Connection:	1/2 NPT female
Construction:	Stainless Steel 316L (1.4404) Monel 400 (2.4360) Hastelloy C-276 (2.4819) others on request
Max. Pressure Rating:	420 bar at 38 °C (6092 psi at 100 °F) more details, check chart below
Max. Temperature Rating for:	
PTFE	232 °C (450 °F)
Graphite	550 °C (1.022 °F)
Oxygen service	200 °C (392 °F)
Min. Temperature Rating for:	
PTFE	-40 °C (-40 °F)
Graphite	-40 °C (-40 °F)

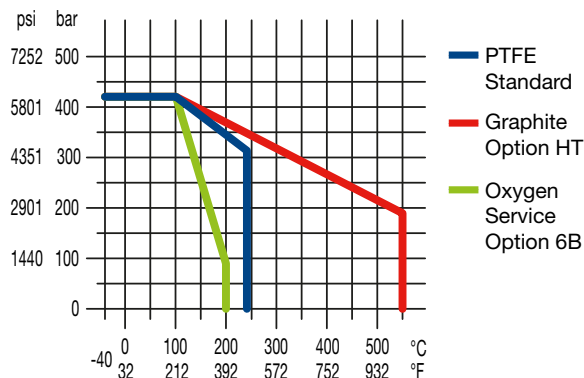

KEY BENEFITS

- Available for oxygen service
- Color-coded dust caps prevent dust ingress and identifies handle function
- PTFE Packing (other materials available upon request)
- Stem with cold rolled surface, back seat and non-rotating needle tip
- Supplied with wetted parts according to NACE MR0175/MR0103 (CD-5 Certificate)
- Material traceability reports available per EN 10204 3.1

COMPONENTS

Wetted

Body	316L (1.4404)
Valve stem	316L (1.4404)
Needle tip	316Ti (1.4571)
Packing	PTFE up to 200 °C (390°F)
Gland nut	316 (1.4401)
Screw Plug *1)	316L (1.4404)

Non-Wetted

Bonnet	316 (1.4401)
T-handle	Stainless Steel


*1) Style B, C only

MATERIAL


Gauge Valve - V02 Series Block and Bleed Manifold

DIMENSIONS IN MM [INCH]


For reference only, consult Ashcroft for specific dimensional drawings

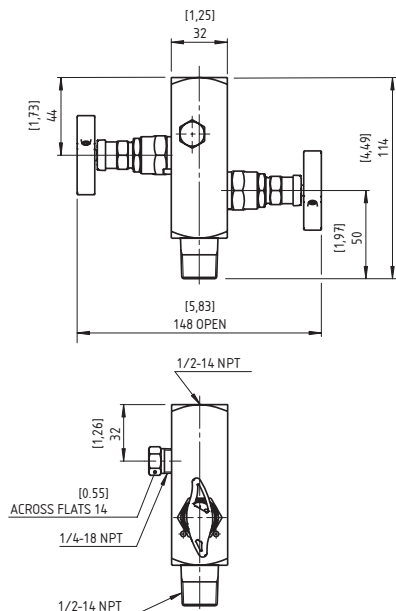

Style A (In-line)

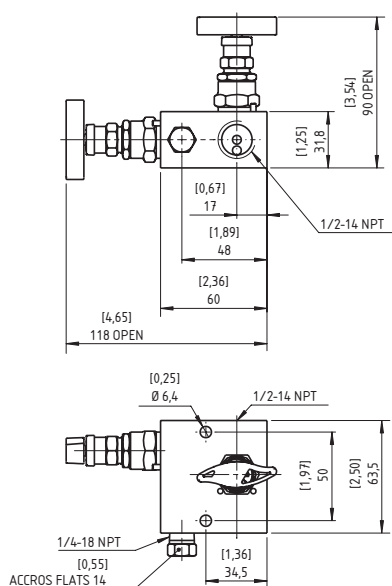




Style B (L-Shape)

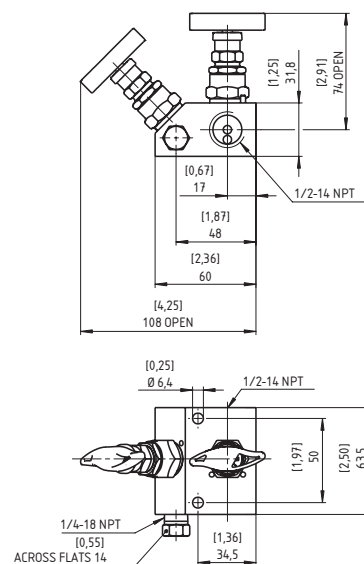

Style C (Y-Shape)

OPTION TM - 2" PIPE MOUNTING BRACKET - DIMENSIONS IN MM [INCH]

For reference only, consult Ashcroft for specific dimensional drawings

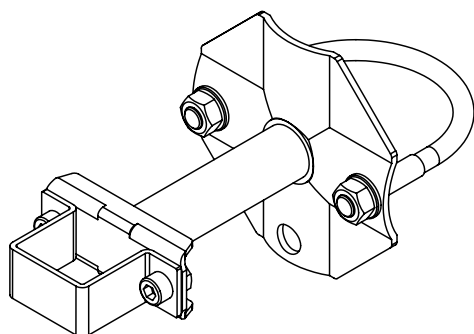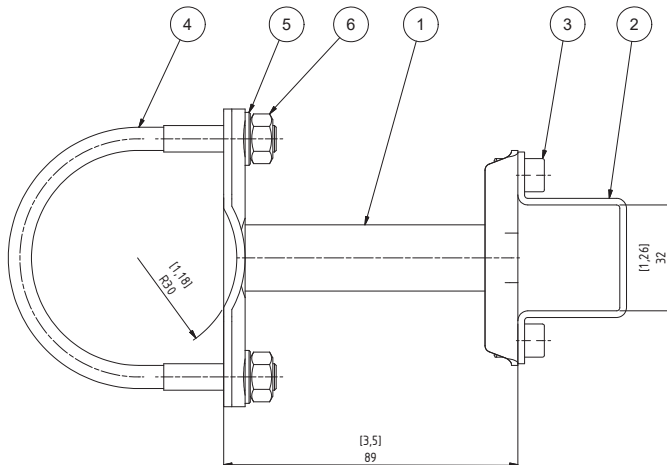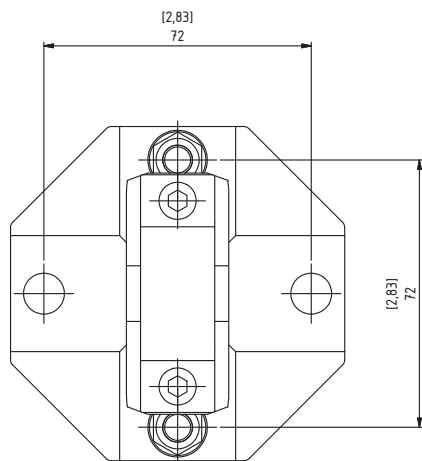

POS.	DESCRIPTION	MATERIAL
1	Mounting bracket	316Ti (1.4571)
2	Bracket	316Ti (1.4571)
3	Socket head cap screw ISO 4762 -M6x10	A4
4	U-bolt M8 for 2" pipe	A4
5	Washer 8,4 DIN 128-B	A4
6	Hexagon nut DIN EN 24032-M8	A4



Gauge Valve - V02 Series Block and Bleed Manifold

ORDERING CODE **EXAMPLE:** 04 V02 2V A SS 50 C3

Process Connection

04	1/2 NPT Male (Style A only)	04
25	1/4 NPT Female	
50	1/2 NPT Female (please ask us for other connections)	

Series Code

V02	Valve Series V02	V02
-----	------------------	-----

Valves

2V	2 Valve	2V
----	---------	----

Version

A	Style A (In-line)	A
B	Style B (L-Shape)	
C	Style C (Y-Shape)	

Material

SS	Stainless steel 316L (1.4404)	SS
PM	Monel 400 (2.4360)	
HH	Hastelloy C-276 (2.4819)	

Instrument Connection

04	1/2 NPT Male (Style A only)	
25	1/4 NPT Female	
50	1/2 NPT Female	50

Options (If choosing an option(s) must include a "X")

HT	Graphite bonnet for high temperature	
TM	2" Pipe mounting bracket	
QC	Arctic operations (-55 °C/-67 °F)	
C3	Material Traceability Report acc. to EN 10204 3.1	C3
CD5	Certificate according to NACE for Oilfields MR0175/ISO 15156-2009 and for Refineries MR0103-2010	
HY	Hydrostatic Testing	
P7	Power piping acc. to ASME B31.1	
PN700	High pressure (10.000 psi / 689 bar)	
6B	Cleaned for Oxygen Service	
NH	Stainless Steel Tags	

