
Type - 6B


Size	Rating	∅D	T	∅g	E	∅k	∅l	∅dM	∅p	Ring No. R or RX	WEIGHT KG
2 1/16"	13,8 MPa (2000 psi)	[6,50] 165	[1,31] 33,4	[4,25] 108	[0,31] 7,9	[5,00] 127,0	[0,79] 20	[1,73] 44	[3,25] 82,6	23	5,8
	20,7 MPa (3000 psi)	[8,46] 215	[1,81] 46,1	[4,88] 124		[6,50] 165,1	[1,02] 26	[2,24] 57	[3,75] 95,3	24	12,8
	34,5 MPa (5000 psi)										
2 9/16"	13,8 MPa (2000 psi)	[7,48] 190	[1,44] 36,6	[5,00] 127		[5,87] 149,2	[0,91] 23		[4,00] 101,6	26	8,3
	20,7 MPa (3000 psi)	[9,65] 245	[1,94] 49,3	[5,39] 137		[7,50] 190,5	[1,14] 29		[4,25] 108,0	27	17,6
	34,5 MPa (5000 psi)										
3 1/8"	13,8 MPa (2000 psi)	[8,27] 210	[1,56] 39,7	[5,75] 146		[6,63] 168,3	[0,91] 23		[4,87] 123,8	31	11,2
	20,7 MPa (3000 psi)	[9,45] 240	[1,81] 46,1	[6,14] 156		[7,50] 190,5	[1,02] 26				16,5
	34,5 MPa (5000 psi)	[10,43] 265	[2,19] 55,6	[6,61] 168		[8,00] 203,2	[1,26] 32	[3,46] 88	[5,37] 136,5	35	23,3

Type - 6BX

Size	Rating	∅D	T	∅g	E	∅k	∅l	∅dM	∅p	Ring No. BX	Weight KG
1 13/16"	69,0 MPa (10000 psi)	[7,28] 185	[1,66] 42,1	[4,13] 105	[0,22] 5,5	[5,75] 146,1	[0,91] 23	[1,73] 44	[2,59] 65,9	151	8,5
	103,5 MPa (15000 psi)	[8,27] 210	[1,78] 45,3	[4,17] 106		[6,31] 160,3	[1,02] 26				11,6
	138,0 MPa (20000 psi)	[10,04] 255	[2,50] 63,5	[4,61] 117		[8,00] 203,2	[1,14] 29				23,9
2 1/16"	69,0 MPa (10000 psi)	[7,87] 200	[1,74] 44,1	[4,37] 111	[0,23] 5,9	[6,25] 158,8	[0,91] 23		[2,90] 73,6	152	10,6
	103,5 MPa (15000 psi)	[8,66] 220	[2,00] 50,8	[4,49] 114		[6,87] 174,6	[1,02] 26				14,4
	138,0 MPa (20000 psi)	[11,22] 285	[2,81] 71,5	[5,20] 132		[9,06] 230,2	[1,26] 32				33,7
2 9/16"	69,0 MPa (10000 psi)	[9,06] 230	[2,02] 51,2	[5,20] 132	[0,26] 6,7	[7,25] 184,2	[1,02] 26	[2,24] 57	[3,49] 88,7	153	16,2
	103,5 MPa (15000 psi)	[10,04] 255	[2,25] 57,2	[5,24] 133		[7,87] 200,0	[1,14] 29				21,9
	138,0 MPa (20000 psi)	[12,80] 325	[3,13] 79,4	[5,94] 151		[10,31] 261,9	[1,38] 35				49,0
3 1/16"	69,0 MPa (10000 psi)	[10,63] 270	[2,30] 58,4	[5,98] 152	[0,30] 7,5	[8,50] 215,9	[1,14] 29		[4,08] 103,6	154	25,6
	103,5 MPa (15000 psi)	[11,42] 290	[2,53] 64,3	[6,06] 154		[9,06] 230,2	[1,26] 32				23,0
	138,0 MPa (20000 psi)	[13,98] 355	[3,38] 85,8	[6,73] 171		[11,31] 287,3	[1,54] 39				63,0

INSTRUMENT CONN. THREADS	CODE
WELDING PORT	00T
1/4-18 NPT FEMALE	02T
1/2-14 NPT FEMALE	04T
G 1/4 FEMALE; DIN EN 837	26T
G 1/2 FEMALE; DIN EN 837	51T



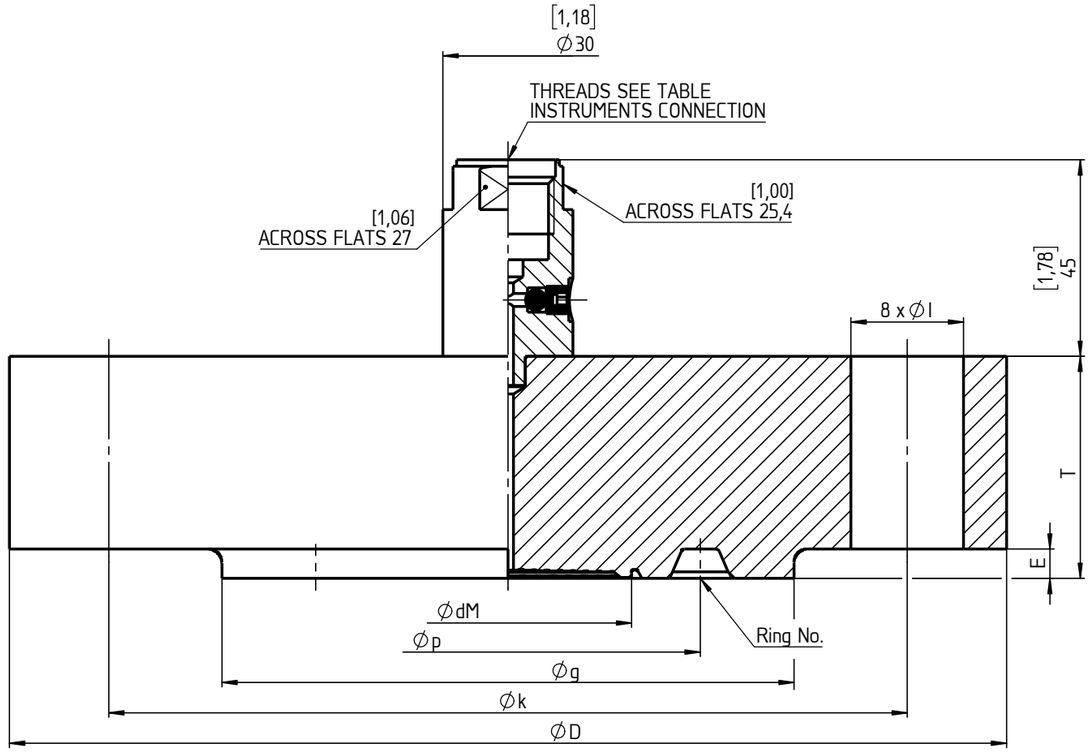

All specifications are subject to change without notice.

This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for a specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.

Rev.	Description	Date	Na.
A	Drawing updated	31.08.20	Krott

	Date	Name
Drawn	11.02.16	J. Krott
Checked	01.09.20	

Dimensions in mm [inch]

General Dimension Seal DF_API API 6A-Type-6B / 6BX

ASHCROFT

DWG. NO.
C 076 I 3-DF_API