



Type - 6B											
Size	Rating	ØD	T	Øg	E	Øk	Øl	ØdM	Øp	Ring No. R or RX	WEIGHT KG
2 1/16"	13,8 MPa (2000 psi)	[6,50] 165	[1,31] 33,4	[4,25] 108	[0,31] 7,9	[5,00] 127,0	[0,79] 20	[1,73] 44	[3,25] 82,6	23	5,8
	20,7 MPa (3000 psi)	[8,46] 215	[1,81] 46,1	[4,88] 124		[6,50] 165,1	[1,02] 26	[2,24] 57	[3,75] 95,3	24	12,8
	34,5 MPa (5000 psi)								[4,00] 101,6	26	8,3
2 9/16"	13,8 MPa (2000 psi)	[7,48] 190	[1,44] 36,6	[5,00] 127	[0,31] 7,9	[5,87] 149,2	[0,91] 23	[2,24] 57	[4,25] 108,0	27	17,6
	20,7 MPa (3000 psi)	[9,65] 245	[1,94] 49,3	[5,39] 137		[7,50] 190,5	[1,14] 29		[4,87] 123,8	31	11,2
	34,5 MPa (5000 psi)								[5,37] 136,5	35	23,3
3 1/8"	13,8 MPa (2000 psi)	[8,27] 210	[1,56] 39,7	[5,75] 146	[0,22] 5,5	[6,63] 168,3	[0,91] 23	[1,73] 44	[2,59] 65,9	151	8,5
	20,7 MPa (3000 psi)	[9,45] 240	[1,81] 46,1	[6,14] 156		[7,50] 190,5	[1,02] 26		[2,90] 73,6		152
	34,5 MPa (5000 psi)	[10,43] 265	[2,19] 55,6	[6,61] 168		[8,00] 203,2	[1,26] 32	[3,46] 88	[5,37] 136,5	35	23,3

INSTRUMENT CONN. THREADS	CODE
WELDING PORT	00T
1/4-18 NPT FEMALE	02T
1/2-14 NPT FEMALE	04T
G 1/4 FEMALE; DIN EN 837	26T
G 1/2 FEMALE; DIN EN 837	51T

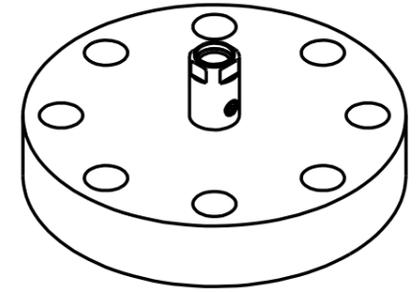

Type - 6BX											
Size	Rating	ØD	T	Øg	E	Øk	Øl	ØdM	Øp	Ring No. BX	Weight KG
1 13/16"	69,0 MPa (10000 psi)	[7,28] 185	[1,66] 42,1	[4,13] 105	[0,22] 5,5	[5,75] 146,1	[0,91] 23	[1,73] 44	[2,59] 65,9	151	8,5
	103,5 MPa (15000 psi)	[8,27] 210	[1,78] 45,3	[4,17] 106		[6,31] 160,3	[1,02] 26		[2,90] 73,6		152
	138,0 MPa (20000 psi)	[10,04] 255	[2,50] 63,5	[4,61] 117		[8,00] 203,2	[1,14] 29	[3,49] 88,7	153	21,9	
2 1/16"	69,0 MPa (10000 psi)	[7,87] 200	[1,74] 44,1	[4,37] 111	[0,26] 6,7	[6,25] 158,8	[0,91] 23	[2,24] 57	[4,08] 103,6	154	25,6
	103,5 MPa (15000 psi)	[8,66] 220	[2,00] 50,8	[4,49] 114		[6,87] 174,6	[1,02] 26		[4,08] 103,6		154
	138,0 MPa (20000 psi)	[11,22] 285	[2,81] 71,5	[5,20] 132		[9,06] 230,2	[1,26] 32			63,0	
2 9/16"	69,0 MPa (10000 psi)	[9,06] 230	[2,02] 51,2	[5,20] 132	[0,30] 7,5	[7,25] 184,2	[1,02] 26	[2,24] 57		154	25,6
	103,5 MPa (15000 psi)	[10,04] 255	[2,25] 57,2	[5,24] 133		[7,87] 200,0	[1,14] 29				
	138,0 MPa (20000 psi)	[12,80] 325	[3,13] 79,4	[5,94] 151		[10,31] 261,9	[1,38] 35			63,0	
3 1/16"	69,0 MPa (10000 psi)	[10,63] 270	[2,30] 58,4	[5,98] 152	[0,30] 7,5	[8,50] 215,9	[1,14] 29	[2,24] 57		154	25,6
	103,5 MPa (15000 psi)	[11,42] 290	[2,53] 64,3	[6,06] 154		[9,06] 230,2	[1,26] 32				
	138,0 MPa (20000 psi)	[13,98] 355	[3,38] 85,8	[6,73] 171		[11,31] 287,3	[1,54] 39			63,0	

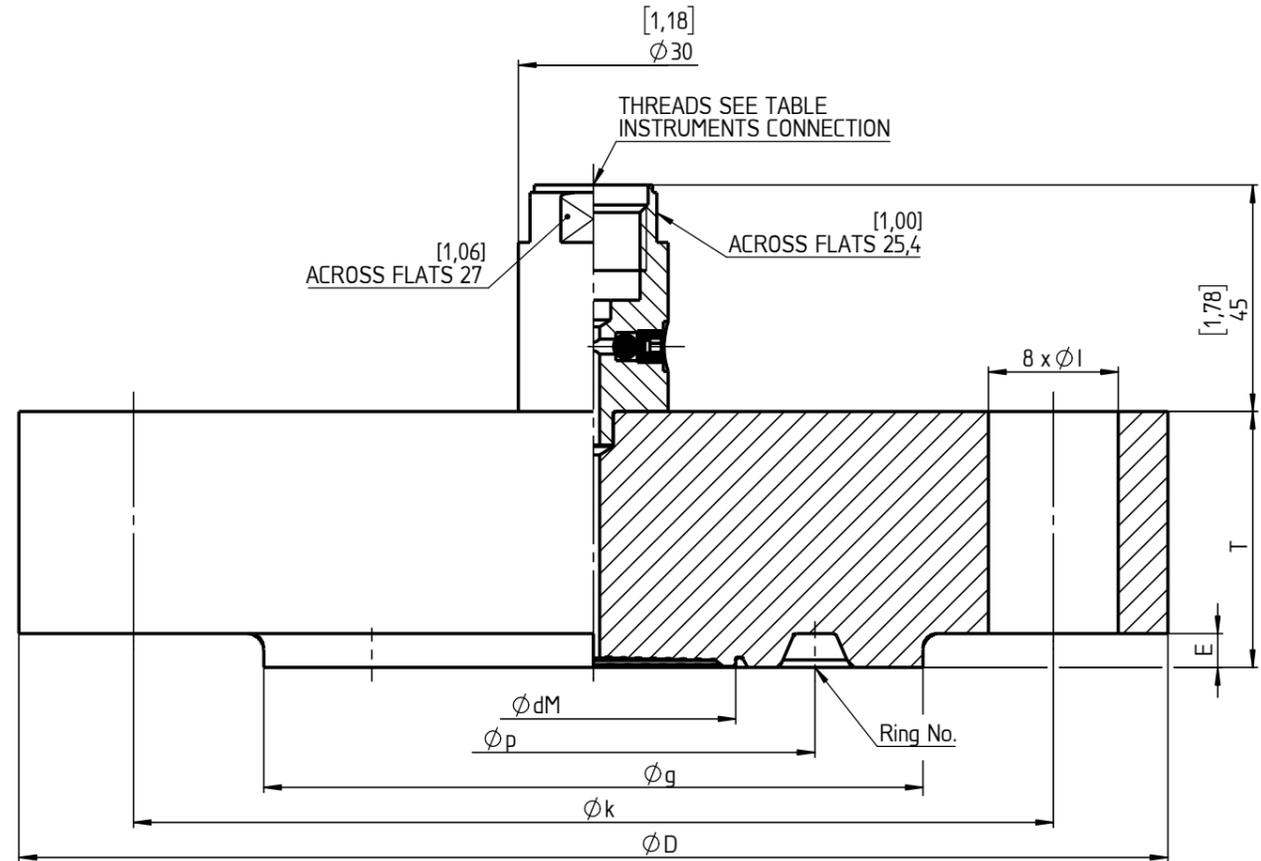

All specifications are subject to change without notice.

This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for a specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.				Dimensions in mm [inch]		
				General Dimension		
				Seal DF_API		
				API 6A-Type-6B / 6BX		
				DWG. NO.		
				C 076 I 3-DF_API		
A	Drawing updated	31.08.20	Krott	ASHCROFT		
Rev.	Description	Date	Na.			